



# CATEYE STRADA DIGITAL WIRELESS

## CC-RD430DW Quick Start

---

Click the button and follow the instructions.

Thank you for purchasing our cyclocomputer CATEYE STRADA DIGITAL WIRELESS.

This Quick Start Manual explains how to set up the computer and how to install the unit on your bicycle.

Please set up the unit according to the specified procedure, then it will be ready for use as a cyclocomputer.



- **Before use, read the instruction manual that comes with the product thoroughly to the end to understand the functions of this unit, and to use it safely in a correct manner.**
- **Pacemaker users should never use the heart rate sensor.**



This PDF contains a movie file.

When you click on the movie screen, a message regarding security appears. Click the “**Trust in the text**” or “**Play**” button to close the message.

Click the screen again to play the movie.



# CATEYE STRADA DIGITAL WIRELESS


## Quick Start Manual

**Contents**

Click the item you wish to view.

## Operation of buttons

Set up the computer by operating the buttons as follows.  
Check the button position before you start setting up.

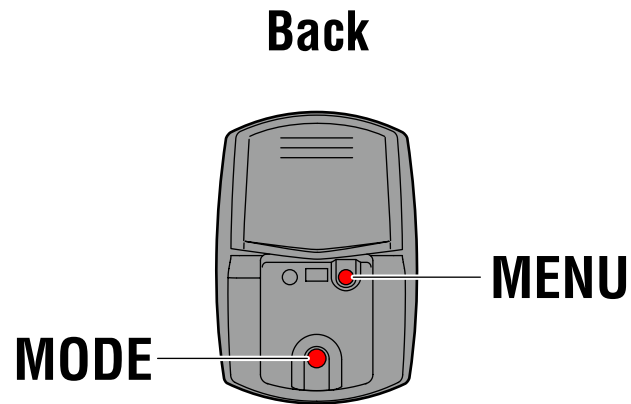

Press the **MENU** button and the **MODE** button on the back of the computer.



# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

### Setting up the computer

Clear all data (initialization)

Setting the speed unit


Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen  
(Setup completed)

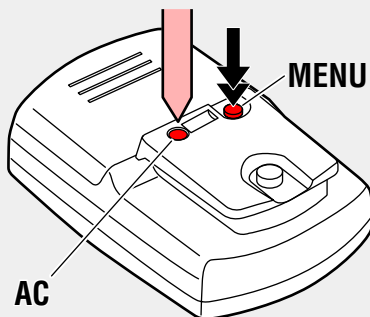

### Formatting operation

Press the **MENU** button on the back of the computer and the **AC** button simultaneously.

\* Press and hold the **MENU** button for 3 seconds after you release the **AC** button.

After full lighting of the screen, the computer switches to the speed unit setting screen to start setup.



Full lighting



Setting the speed unit



# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

### Setting up the computer

Clear all data (initialization)

Setting the speed unit

Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen  
(Setup completed)




Setting the speed unit

### Setting the speed unit

When the **MODE** button is pressed, either “**km/h**” or “**mph**” is selected for the speed unit display. Select the display of your choice.


After selecting, press the **MENU** button to proceed to the next step “Entering the tire circumference”.

km/h ↔ mph



**MODE**

To the next step



**MENU**



# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

### Setting up the computer

Clear all data (initialization)

Setting the speed unit

Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen  
(Setup completed)




Entering the tire  
circumference

### Entering the tire circumference

Enter the tire circumference (mm) of your bicycle with 4 digits using the tire circumference reference table.


Pressing the **MODE** button increases the value flashing, and pressing and holding the **MODE** button moves to the next digit. After entering, press the **MENU** button to proceed to the next step "Setting the clock display".

Increase the value



**MODE**


Move digit



**MODE**

(Press and hold)

To the next step



**MENU**



# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

### Setting up the computer

Clear all data (initialization)

Setting the speed unit

Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen  
(Setup completed)




Clock display

### Setting the clock display

When the **MODE** button is pressed, either “12h” or “24h” is selected for the clock display. Select the display of your choice.

After selecting, press and hold the **MODE** button to proceed to the next step “Setting the hour”.

24h ↔ 12h



**MODE**

To the next step



**MODE**

(Press and hold)



# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

### Setting up the computer

Clear all data (initialization)

Setting the speed unit

Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen  
(Setup completed)




Hour

### Setting the hour

Pressing the **MODE** button increases the value flashing ("Hour" of the clock). Enter any value.


After entering, press and hold the **MODE** button to proceed to the next step "Setting the minute".

Increase the value



**MODE**

To the next step



**MODE**

(Press and hold)





# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

### Setting up the computer

Clear all data (initialization)

Setting the speed unit

Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen  
(Setup completed)




Minute

### Setting the minute

Pressing the **MODE** button increases the value flashing ("Minute" of the clock). Enter any value (Pressing and holding **MODE** rapidly increases the value).


After entering, press the **MENU** button to switch to the measuring screen.

Increase the value



**MODE**

Setup is completed.  
To the measuring screen



**MENU**



# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

### Setting up the computer

Clear all data (initialization)

Setting the speed unit

Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen  
(Setup completed)



Measuring screen

Now, setup of the computer is completed.

If the bracket and speed sensor are not installed on your bicycle, return to Contents, click the movies of how to install the bracket and speed sensor, and install them according to the instructions.



# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

How to install the bracket

**How to install the bracket**  
[FlexTight™]

Click the screen to play.

\* [If the video does not play, please click here. \(YouTube movie\)](#)



# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

How to install the speed sensor

**How to install the speed sensor**  
[ISC-10]

Click the screen to play.

\* [If the video does not play, please click here. \(YouTube movie\)](#)



# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

### How to wear the heart rate sensor

**How to wear the heart rate sensor**  
[HR-10]

Click the screen to play.

\* [If the video does not play, please click here. \(YouTube movie\)](#)



# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

## Setting up the computer

### Tire circumference reference table

\* Generally, the tire size or ETRTO is indicated on the side of the tire.

ETRTO	Tire size	L (mm)
47-203	12x1.75	935
54-203	12x1.95	940
40-254	14x1.50	1020
47-254	14x1.75	1055
40-305	16x1.50	1185
47-305	16x1.75	1195
54-305	16x2.00	1245
28-349	16x1-1/8	1290
37-349	16x1-3/8	1300
32-369	17x1-1/4 (369)	1340
40-355	18x1.50	1340
47-355	18x1.75	1350
32-406	20x1.25	1450
35-406	20x1.35	1460
40-406	20x1.50	1490

ETRTO	Tire size	L (mm)
47-406	20x1.75	1515
50-406	20x1.95	1565
28-451	20x1-1/8	1545
37-451	20x1-3/8	1615
37-501	22x1-3/8	1770
40-501	22x1-1/2	1785
47-507	24x1.75	1890
50-507	24x2.00	1925
54-507	24x2.125	1965
25-520	24x1 (520)	1753
	24x3/4 Tubular	1785
28-540	24x1-1/8	1795
32-540	24x1-1/4	1905
25-559	26x1 (559)	1913
32-559	26x1.25	1950


ETRTO	Tire size	L (mm)
37-559	26x1.40	2005
40-559	26x1.50	2010
47-559	26x1.75	2023
50-559	26x1.95	2050
54-559	26x2.10	2068
57-559	26x2.125	2070
58-559	26x2.35	2083
75-559	26x3.00	2170
28-590	26x1-1/8	1970
37-590	26x1-3/8	2068
37-584	26x1-1/2	2100
	650C Tubular 26x7/8	1920
20-571	650x20C	1938
23-571	650x23C	1944

ETRTO	Tire size	L (mm)
25-571	650x25C 26x1 (571)	1952
40-590	650x38A	2125
40-584	650x38B	2105
25-630	27x1 (630)	2145
28-630	27x1-1/8	2155
32-630	27x1-1/4	2161
37-630	27x1-3/8	2169
18-622	700x18C	2070
19-622	700x19C	2080
20-622	700x20C	2086
<b>23-622</b>	<b>700x23C</b>	<b>2096</b>
25-622	700x25C	2105
28-622	700x28C	2136
30-622	700x30C	2146

ETRTO	Tire size	L (mm)
32-622	700x32C	2155
	700C Tubular	2130
35-622	700x35C	2168
38-622	700x38C	2180
40-622	700x40C	2200
42-622	700x42C	2224
44-622	700x44C	2235
45-622	700x45C	2242
47-622	700x47C	2268
54-622	29x2.1	2288
60-622	29x2.3	2326

### Measure the tire circumference (L) of your bicycle

Adjust the tire pressure properly. With the rider's weight applied on the bicycle, roll the wheel one tire revolution with reference to a marker such as the valve, and measure the travel distance on the ground.



## Registering a new sensor

IDs of sensors supplied with this device are synchronized.

For any other sensors, synchronize the sensor ID according to the following procedure.

\* The Q series, 2.4GHz digital sensor can also be used.



Speed sensor ISC-10  
(**SPEED/CADENCE**)



Speed sensor  
SPD-10



Heart rate sensor  
HR-10



# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

### Registering a new sensor

To “Searching for sensor ID”


Sensor selection

Start of searching for sensor ID

Completion of searching for sensor ID

## Switching to the “Searching for sensor ID” screen

From the measurement screen, press the **MENU** button to switch to the Menu screen. Press the **MODE** button 2 times to switch to the “Searching for sensor ID” screen displaying “Id”, and press and hold the **MODE** button.

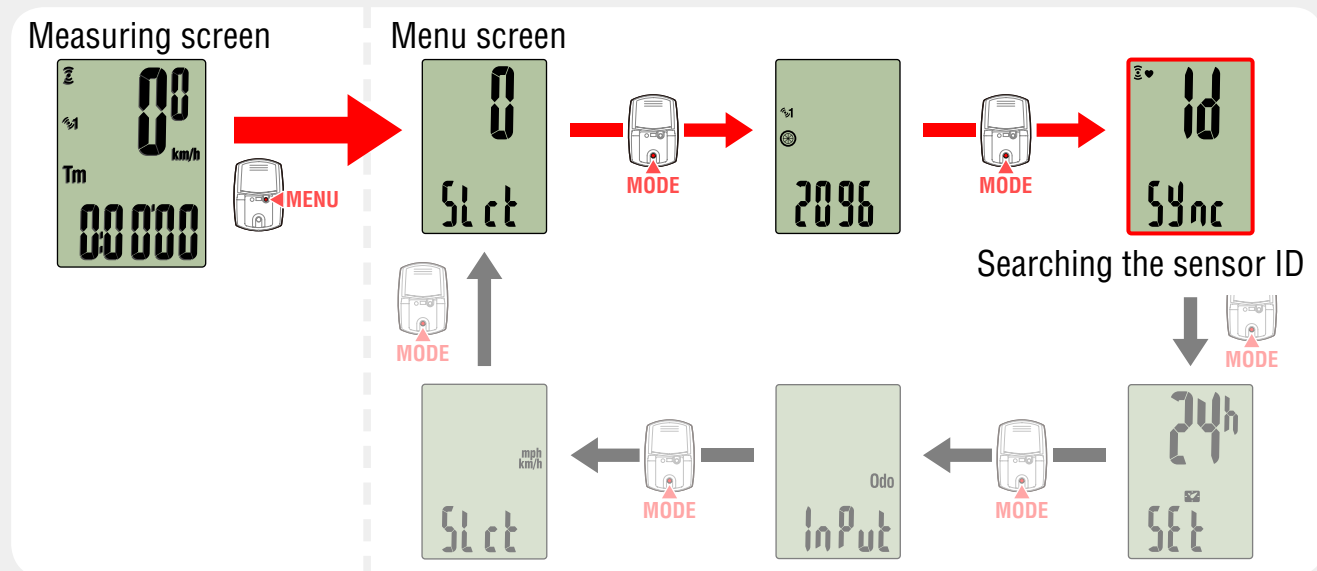





# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

## Registering a new sensor

To "Searching for sensor ID"

Sensor selection

Start of searching for sensor ID

Completion of searching  
for sensor ID



Sensor selection

### Sensor selection


Pressing the **MODE** button switches the display to "**SP1**", "**SP2**", and "**HR**" in this order.

- In case of speed sensor  
Select "**SP1**" or "**SP2**".


\* The sensor supplied with this device has been registered as **SP1**. Once you change this, the sensor supplied with this device cannot be used. Select **SP2** when you register it for your second bicycle.

- In case of heart rate sensor  
Select "**HR**".

\* Once you change the sensor ID, the sensor supplied with this device cannot be used.



SP1 → SP2 → HR





# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

### Registering a new sensor

To "Searching for sensor ID"

Sensor selection

Start of searching for sensor ID

Completion of searching for sensor ID




Standby for the sensor ID

### Start of searching for sensor ID

Pressing the **MENU** button switches to the "Standby for the sensor ID" screen. Then, press the **RESET** button on the sensor.

- \* A sensor ID signal is sent when you press and then release the **RESET** button.
- \* For the Q series, 2.4GHz digital sensor, follow the instructions described in the instruction manual.


Start of searching for sensor ID



Speed sensor




**RESET**



**RESET**

Heart rate sensor



**RESET**

\* [If the video does not play, please click here. \(YouTube movie\)](#)



# CATEYE STRADA DIGITAL WIRELESS

## Quick Start Manual

### Registering a new sensor

To "Searching for sensor ID"

Sensor selection

Start of searching for sensor ID

Completion of searching  
for sensor ID

Completion of searching  
for sensor ID



In case of **SP1** and **SP2**  
(Current speed)




In case of **HR**  
(Heart rate)

### Completion of searching for sensor ID

When the computer correctly receives the sensor ID signal, the current speed or heart rate appears.

After searching, press the **MENU** button 2 times to return to the measurement screen.

Setup is completed.  
To the measuring screen



(Press 2 times)