



CATEYE **PADRONE+** CC-PA110W Quick Start

Click the button and follow the instructions.

Thank you for purchasing our cyclocomputer CATEYE PADRONE+.

This Quick Start Manual explains how to set up the computer and how to install the unit on your bicycle.

Please set up the unit according to the specified procedure, then it will be ready for use as a cyclocomputer.



Before use, read the instruction manual that comes with the product thoroughly to the end to understand the functions of this unit, and to use it safely in a correct manner.

This PDF contains a movie file.

When you click on the movie screen, a message regarding security appears. Click the **“Trust in the text”** or **“Play”** button to close the message.

Click the screen again to play the movie.




CATEYE **PADRONE +** Quick Start Manual

[Contents](#)

Click the item you wish to view.

Operation of buttons

Set up the computer by operating the buttons as follows.
Check the button position before you start setting up.

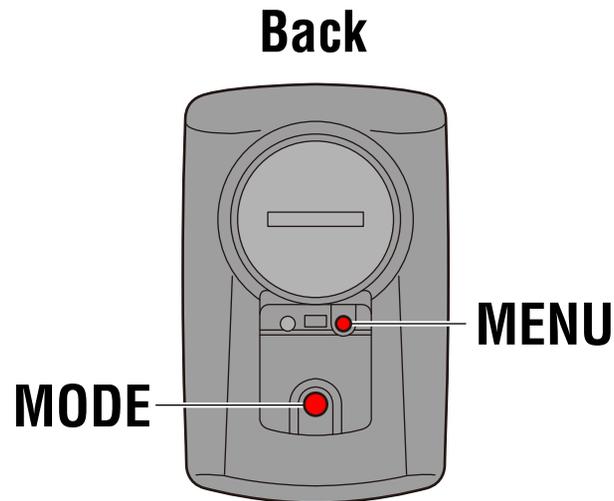

Press the **MENU** button and the **MODE** button on the back of the computer.



CATEYE **PADRONE +** Quick Start Manual

Setting up the computer

Clear all data (initialization)

Setting the speed unit


Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen
(Setup completed)

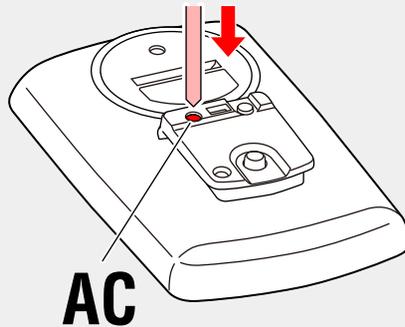


Clear all data (initialization)

Press the **AC** button on the back of the computer.
After full lighting of the screen, the computer switches to the speed unit setting screen to start setup.



Full lighting



Setting the speed unit



CATEYE **PADRONE +** Quick Start Manual

Setting up the computer

Clear all data (initialization)

Setting the speed unit

Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen
(Setup completed)




Setting the speed unit

Setting the speed unit

When the **MODE** button is pressed, either “**km/h**” or “**mph**” is selected for the speed unit display. Select the unit of your choice.


After selecting, press the **MENU** button to proceed to the next step “Entering the tire circumference”.

km/h ↔ mph



MODE

To the next step



MENU



CATEYE **PADRONE +** Quick Start Manual

Setting up the computer

Clear all data (initialization)

Setting the speed unit

Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen
(Setup completed)



Entering the tire circumference


Entering the tire circumference

Enter the tire circumference (mm) of your bicycle with 4 digits using the tire circumference reference table. (0100-3999 mm)

Pressing the **MODE** button increases the value flashing, and pressing and holding the **MODE** button moves to the next digit.


After entering, press the **MENU** button to proceed to the next step "Setting the clock display".

Increase the value



MODE

Move digit



MODE

(Press and hold)

To the next step



MENU



CATEYE **PADRONE +** Quick Start Manual

Setting up the computer

Clear all data (initialization)

Setting the speed unit

Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen
(Setup completed)



Clock display

Setting the clock display

When the **MODE** button is pressed, either “12h” or “24h” is selected for the clock display. Select the display of your choice.

After selecting, press and hold the **MODE** button to proceed to the next step “Setting the hour”.

24h ↔ 12h



MODE

To the next step



MODE (Press and hold)



CATEYE **PADRONE +** Quick Start Manual

Setting up the computer

Clear all data (initialization)

Setting the speed unit

Entering the tire circumference

Setting the clock display


Setting the hour

Setting the minute

Measuring screen
(Setup completed)



Hour



12h format

A: a.m.
P: p.m.


Setting the hour

Pressing the **MODE** button increases the value flashing (“Hour” of the clock). Enter any value.

*When **12h** mode is selected, check whether **A** (a.m.) or **P** (p.m.) is displayed before entering the value.


After entering, press and hold the **MODE** button to proceed to the next step “Setting the minute”.

Increase the value



MODE

To the next step



MODE (Press and hold)



CATEYE **PADRONE +** Quick Start Manual

Setting up the computer

Clear all data (initialization)

Setting the speed unit

Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen
(Setup completed)




Minute

Setting the minute


Pressing the **MODE** button increases the value flashing (“Minute” of the clock). Enter any value.
After entering, press the **MENU** button to switch to the measuring screen.

Increase the value



MODE

Setup is completed.
To the measuring screen



MENU



CATEYE **PADRONE +** Quick Start Manual

Setting up the computer

Clear all data (initialization)

Setting the speed unit

Entering the tire circumference

Setting the clock display

Setting the hour

Setting the minute

Measuring screen
(Setup completed)



Measuring screen

Now, setup of the computer is completed.

If the bracket and speed sensor are not installed on your bicycle, return to Contents, click the movies of how to install the bracket and speed sensor, and install them according to the instructions.



CATEYE **PADRONE +** Quick Start Manual

How to install the bracket

How to install the bracket

Click the screen to play.



CATEYE **PADRONE +** Quick Start Manual

How to install the speed sensor

How to install the speed sensor [Analog speed sensor]

Click the screen to play.




CATEYE **PADRONE +** Quick Start Manual

Backlight (Night Mode)

How to use (Part time)

When Night Mode is ON ( turns on), the backlight will turn ON for the specified amount of time.
When Part time is selected, the backlight will come ON for 5 seconds when the **MODE** button is pressed.
* When the remaining battery power is low (when  turns on), the backlight will not turn on.

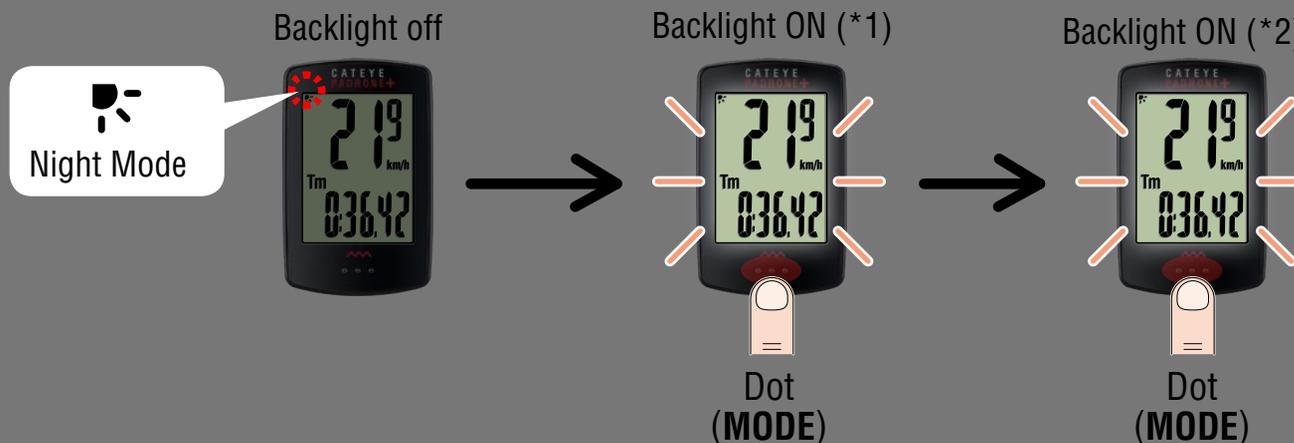

*1 : Pressing the **MODE** button will turn the backlight ON, but the button function will be disabled.

*2 : Pressing the button again while the backlight is ON will enable the button function and extend the illumination time by 5 seconds.




CATEYE PADRONE + Quick Start Manual

Backlight (Night Mode)

How to use (Full time)

When Night Mode is ON ( turns on), the backlight will turn ON for the specified amount of time.
When Full time is selected, the backlight will come ON while the bicycle is in motion and will turn OFF 30 seconds after the bicycle has stopped.

* When the remaining battery power is low (when  turns on), the backlight will not turn on.

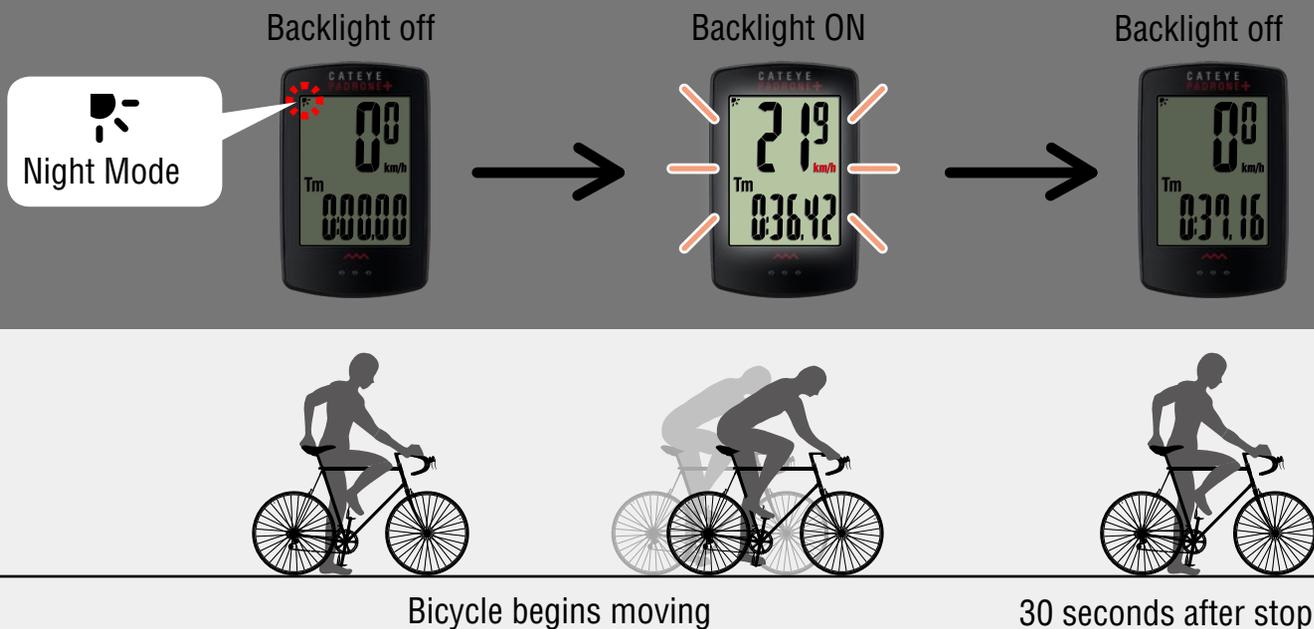




CATEYE **PADRONE +** Quick Start Manual

Backlight (Night Mode)

Setting method

On the measuring screen, press the **MENU** button to display the “Night Mode setting” on the menu screen. Press and hold the **MODE** button, and then turn Night Mode ON/OFF and set the start time, end time, and the illumination method.

* After changing settings, make sure to press the **MENU** button to confirm changes.

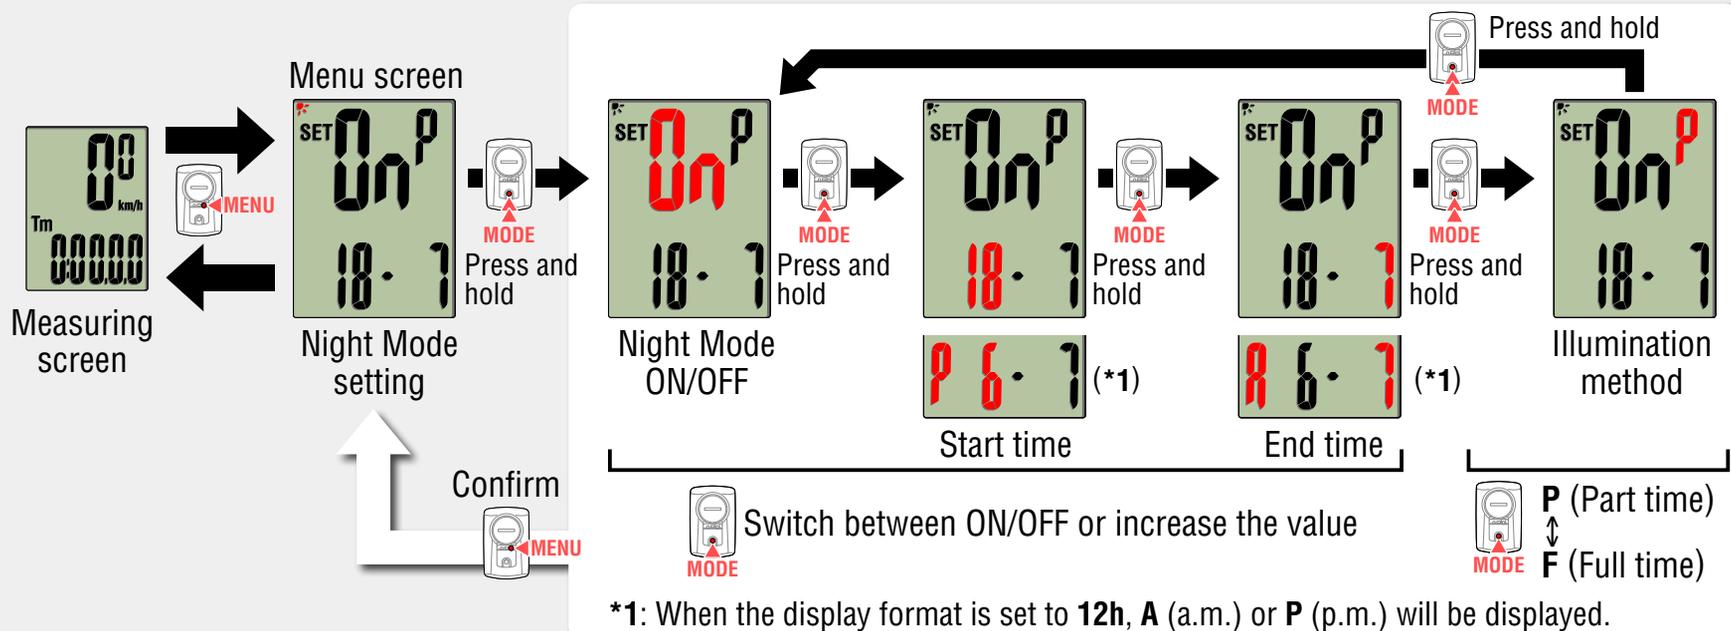



CATEYE PADRONE + Quick Start Manual

Setting up the computer

Tire circumference reference table

* Generally, the tire size or ETRTO is indicated on the side of the tire.

ETRTO	Tire size	L (mm)
47-203	12x1.75	935
54-203	12x1.95	940
40-254	14x1.50	1020
47-254	14x1.75	1055
40-305	16x1.50	1185
47-305	16x1.75	1195
54-305	16x2.00	1245
28-349	16x1-1/8	1290
37-349	16x1-3/8	1300
32-369	17x1-1/4 (369)	1340
40-355	18x1.50	1340
47-355	18x1.75	1350
32-406	20x1.25	1450
35-406	20x1.35	1460
40-406	20x1.50	1490

ETRTO	Tire size	L (mm)
47-406	20x1.75	1515
50-406	20x1.95	1565
28-451	20x1-1/8	1545
37-451	20x1-3/8	1615
37-501	22x1-3/8	1770
40-501	22x1-1/2	1785
47-507	24x1.75	1890
50-507	24x2.00	1925
54-507	24x2.125	1965
25-520	24x1 (520)	1753
	24x3/4 Tubular	1785
28-540	24x1-1/8	1795
32-540	24x1-1/4	1905
25-559	26x1 (559)	1913
32-559	26x1.25	1950

ETRTO	Tire size	L (mm)
37-559	26x1.40	2005
40-559	26x1.50	2010
47-559	26x1.75	2023
50-559	26x1.95	2050
54-559	26x2.10	2068
57-559	26x2.125	2070
58-559	26x2.35	2083
75-559	26x3.00	2170
28-590	26x1-1/8	1970
37-590	26x1-3/8	2068
37-584	26x1-1/2	2100
	650C Tubular 26x7/8	1920
20-571	650x20C	1938
23-571	650x23C	1944

ETRTO	Tire size	L (mm)
25-571	650x25C 26x1 (571)	1952
40-590	650x38A	2125
40-584	650x38B	2105
25-630	27x1 (630)	2145
28-630	27x1-1/8	2155
32-630	27x1-1/4	2161
37-630	27x1-3/8	2169
40-584	27.5x1.50	2079
54-584	27.5x2.1	2148
57-584	27.5x2.25	2182
18-622	700x18C	2070
19-622	700x19C	2080
20-622	700x20C	2086
23-622	700x23C	2096

ETRTO	Tire size	L (mm)
25-622	700x25C	2105
28-622	700x28C	2136
30-622	700x30C	2146
32-622	700x32C	2155
	700C Tubular	2130
35-622	700x35C	2168
38-622	700x38C	2180
40-622	700x40C	2200
42-622	700x42C	2224
44-622	700x44C	2235
45-622	700x45C	2242
47-622	700x47C	2268
54-622	29x2.1	2288
56-622	29x2.2	2298
60-622	29x2.3	2326

Measure the tire circumference (L) of your bicycle

Adjust the tire pressure properly. With the rider's weight applied on the bicycle, roll the wheel one tire revolution with reference to a marker such as the valve, and measure the travel distance on the ground.

